



NICOMATIC is certified
ISO9001:2008 / EN9100:2009

OMM Series 8

Maximum reliability in less than 2 grams

PART NUMBERING

Configure your OMM to meet your requirements



Micro circular connector range

Gender (1 = male / 2 = female)

Contact termination*

Housing size (8 position)

Fixing Hardware

Male = Jackscrew

F21: nut insert M2


F22 with Y: pcb 0.8 – 2mm

F24 with YL: pcb 1.5 – 4mm

F22, F24, F24L with TL (for F24L: pcb 3.5 – 6mm max)

Female = Jackscrew

HO1 / HO1C (captive screw*)

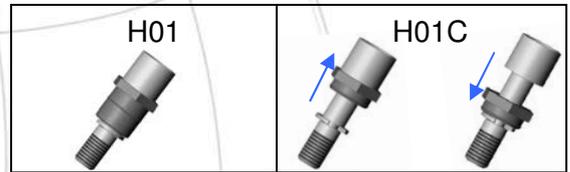


Cavity loading selection

Refer to diagram below

CAVITY LOADING SELECTION

Select cavity loading

according to LF contact position number

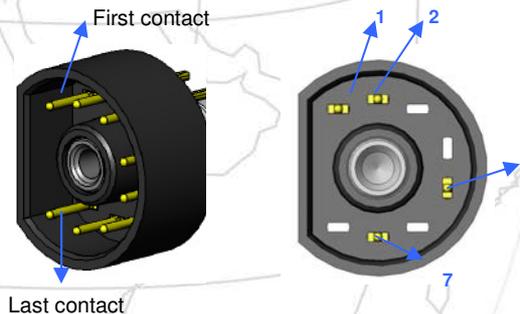

Example
OM1YL08F241257

STANDARD RANGE

- Housing size: 8 positions (6 or 10 upon request)
- Contact termination*
 - Male Straight PCB
 - Y for pcb 0.8-2mm / YL for pcb 1.5-4mm
 - Male Straight SMT
 - TL for pcb any thickness
 - Female to crimp on cable
 - C for AWG 22: / S for AWG 24-28
- Other configurations and features upon request:
Shielding, gasket, back-potting

TECHNICAL DATA

- Temperature -60°C +260°C
- Current per contact 3A
- Complies with MIL-DTL-55302F
- Contacts Gold plated 1µm (male), >1.25µm (female)

YOUR NICOMATIC SERVICES



Contact:

Nicomatic services: www.nicomatic.com/direct.htm



Scan for more information
With your QR code application



Manufacturer and designer of
innovative interconnect solutions

OMM Series 8

Maximum reliability in less than 2 grams




FEATURES

- Board to cable
- From 1 to 8 contacts
- MIL-DTL-55302F
- Captive screw fixing
- Cavity loading selection
- Removable contacts

APPLICATIONS

- Aeronautic
- Defense & Security
- Unmanned Aerial Vehicles (UAV)
- Unmanned Vehicle Systems (UVS)
- Robotics
- Civil security industry
- Medical...

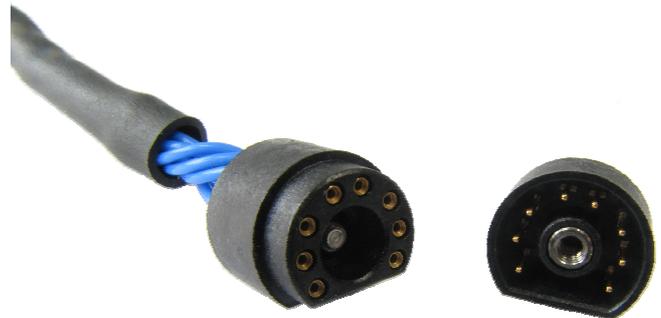

MAIN BENEFITS

- Up to 50% **weight and space saved** vs. CMM 220
- **Easy & secure** interconnection
- Reliability for **harsh environments & small spaces**
- **Modularity** 1 to 8 contacts
- **Easy maintenance**



www.nicomatic.com

