

Pneumatic Crimping Press 10500-SA(P)




NICOMATIC is certified
 ISO9001:2008 / EN9100:2009

- Easy to use
- Simple & quick change of tooling, easy set up
- Up to 36 contacts crimped in one stroke

REFERENCE

PNEUMATIC PRESS 10500-SA(P)

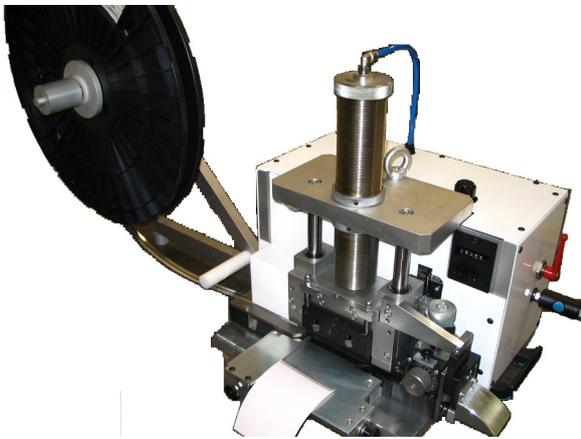

GENERAL SPECIFICATION

The machine aims at selecting and crimping male or female NICOMATIC contacts CRIMPFLEX® type on jumpers or flexible circuits semi-automatically.

Male contact P/N: 10241 / 10167 / 10067 / 11612 / 13595
 Female contact P/N: 11506 / 10025 / 14106
 Square male contacts: 12410

The number of contacts to be crimped is selected manually and can vary from 2 to 36. The jumper or flexible contact presentation is made manually by the operator as well as the cycle starting up.

The contacts are moved into the tool automatically according to graduated positions on the rotative cylinder, corresponding to the required number of contacts to be crimped. This machine is also equipped with a downcounter, which allows pre-selecting a precise number of operations and stops automatically once it is back to zero. The press is operated by foot pedal. Crimping of 2 to 36 points in standard.

USE OF TOOLINGS

Male tooling for: 10141, 10241, 10067, 10167, 12887
 Female tooling for: 10025, 11506, 11612, 13595, 14106
 Male tooling for square male contacts: 12410

PRODUCT VERSIONS

P/N 10500-SA (with Male and female tooling)
 P/N 10500-SAP
 (with Male, Female and square male tooling)

Possibility to move from –SA to –SAP anytime by acquiring the tooling for square male contacts